

Interoffice

# Memo

**To: Bob Schaefer, P.E., Asst. Dir. of P.W.****Date: March 26, 1998****From: Randy Lyman, Pretreatment Coordinator****Re: Closed Burger Station Inspections 3/25-26/1998 you requested.****CC: Ed Malter, Pretreatment Inspectors, Food Inspection(Health)**2456 N. Kansas Expressway

Closed. Sampling manhole present, holes near bottom with rocks and dirt protruding in, not concreted in, no apparent seal between wall and floor, invert shelves full of dirt, no ram-nek visible under ring and lid casting. Pipe has been sawed out to allow sampling. No grease noticeable in sampling manhole. No outside grease trap. Building was locked and all fixtures removed. By looking through the window it appears to have a 20(?) pound grease trap in the floor where the 3-vat sink used to be. Had a Crouch casting.

500 S. Glenstone


Closed. Sampling manhole present, holes near bottom with rocks and dirt protruding in, not concreted in, no apparent seal between wall and floor, invert shelves full of dirt, no ram-nek visible under ring and lid casting. Pipe has been sawed out to allow sampling. No grease noticeable in sampling manhole. No outside grease trap. Building was locked and all fixtures removed. By looking through the window it appears to have a 20(?) pound grease trap above the floor where the 3-vat sink used to be. Had a Neenah type locking lid casting.


### 4035 S. Campbell

Closed. Sampling manhole present, no apparent seal between wall and floor, invert shelves full of dirt, no ram-nek visible under ring and lid casting. Pipe has been sawed out to allow sampling. No grease noticeable in sampling manhole. No outside grease trap. Building was locked and all fixtures removed. By looking through the window it appears to have a 20(?) pound grease trap in the floor where the 3-vat sink used to be. Had a Crouch type casting. No sign of grease in City sewer downstream from connection.

### 1740 E. Battlefield (North side of Venture Store)

Closed. Building is gone and lot has been repaved where building used to be. No sign of where sampling manhole used to be or where sewer connection may have been to City sewer.

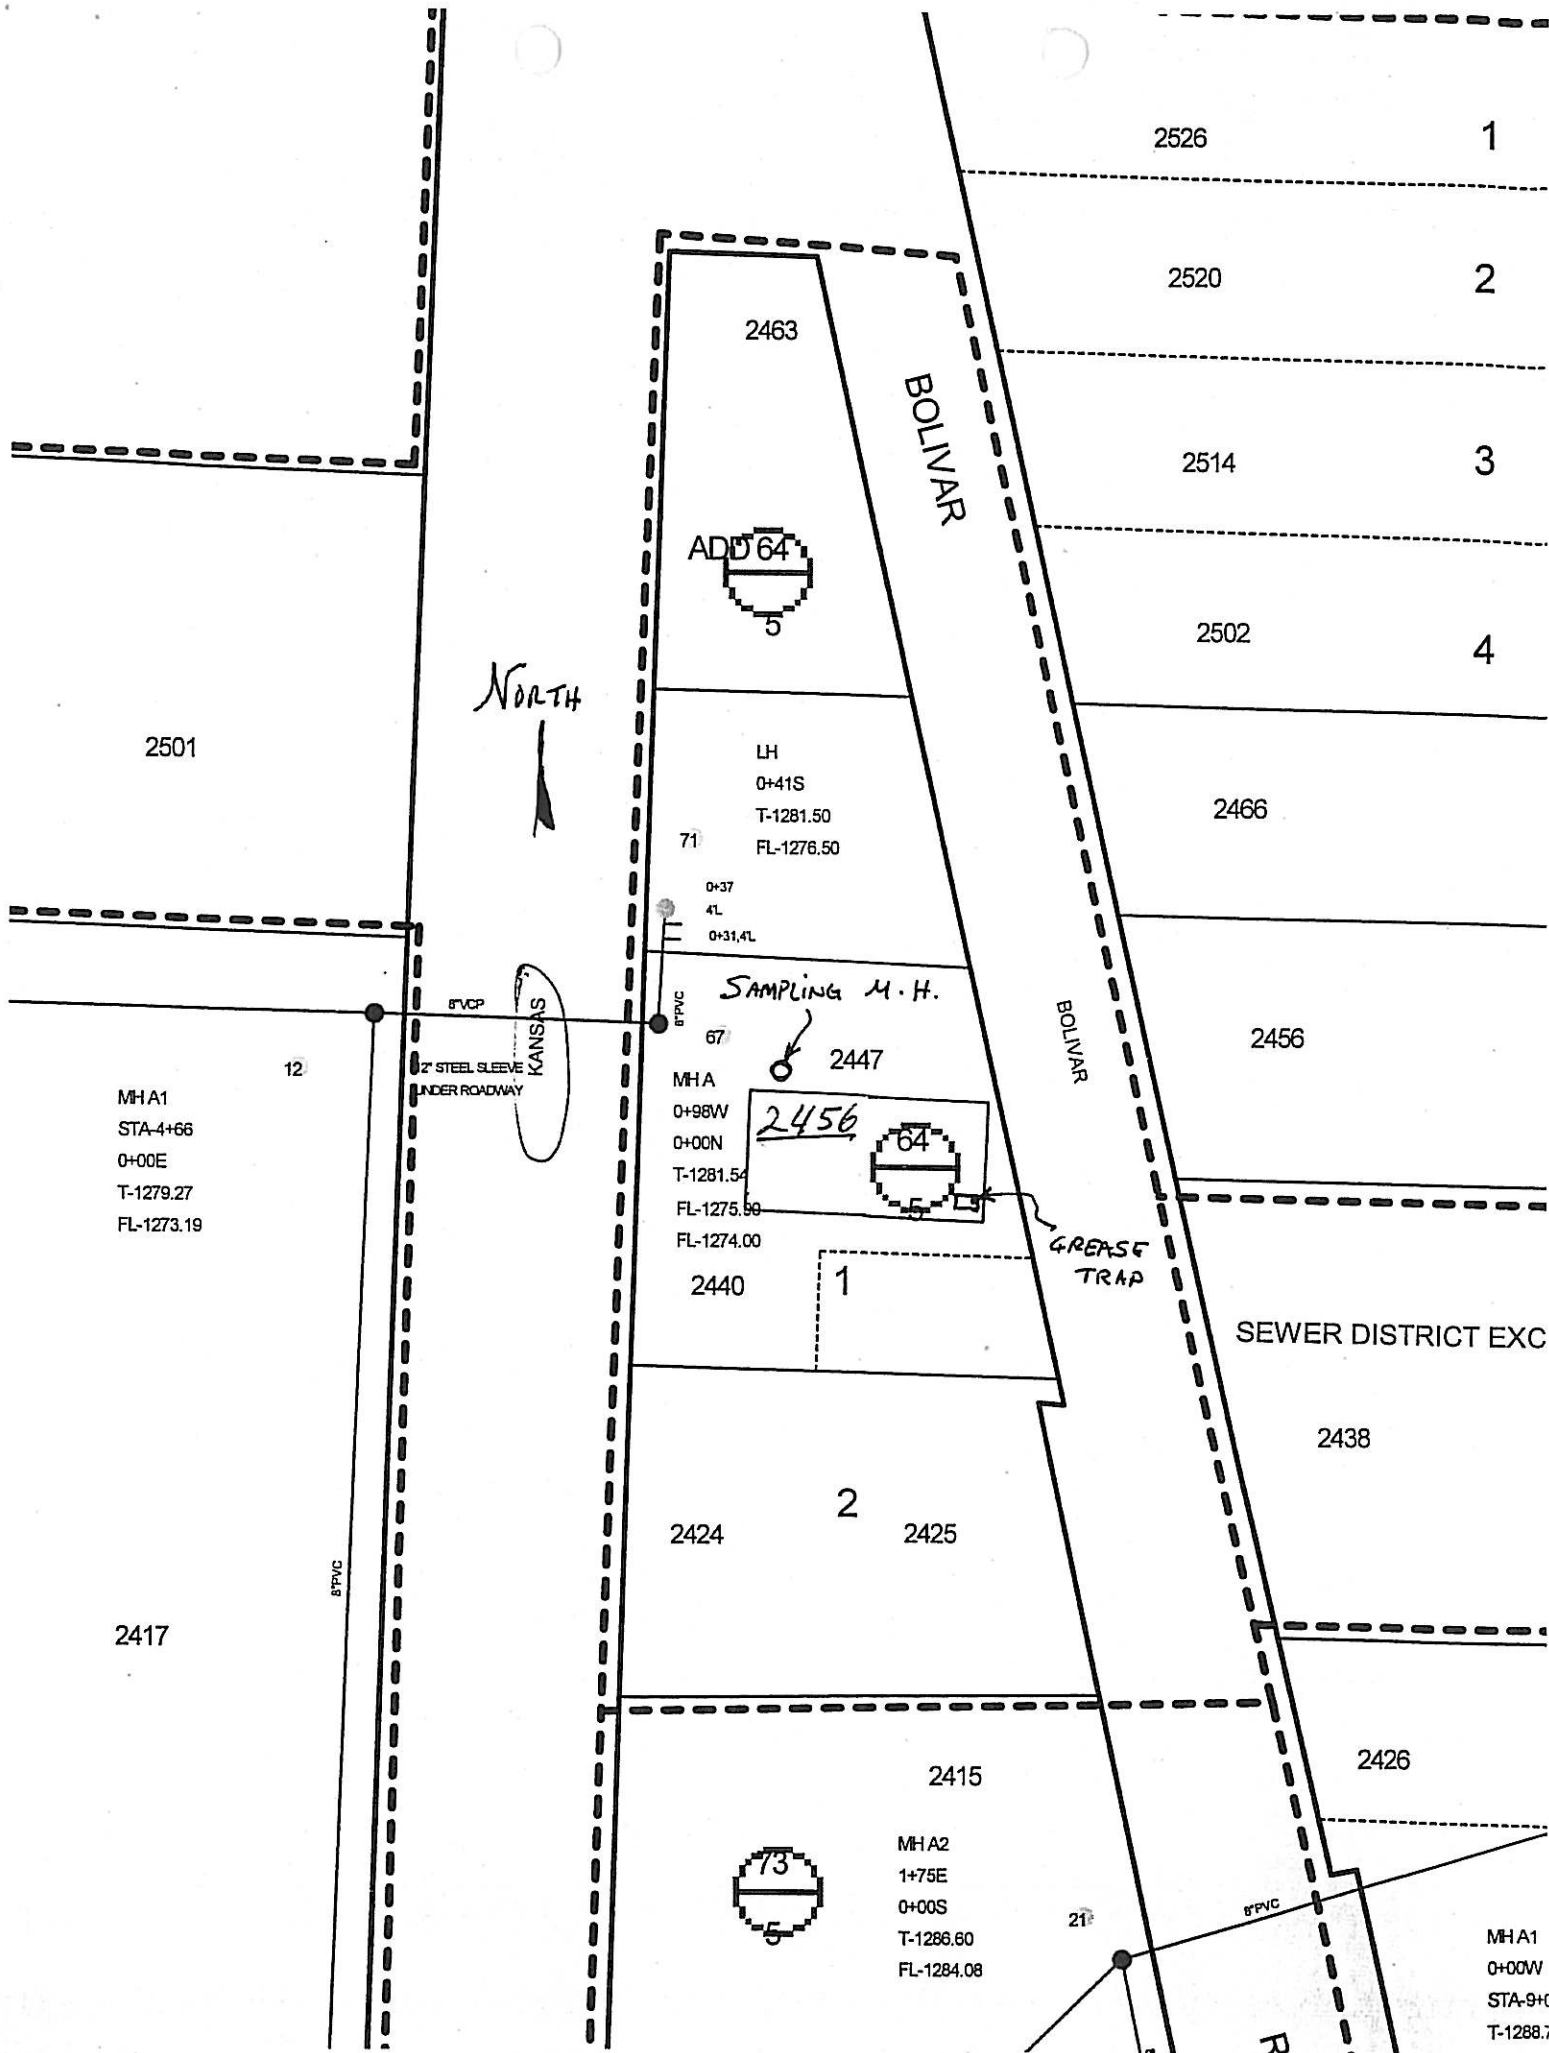

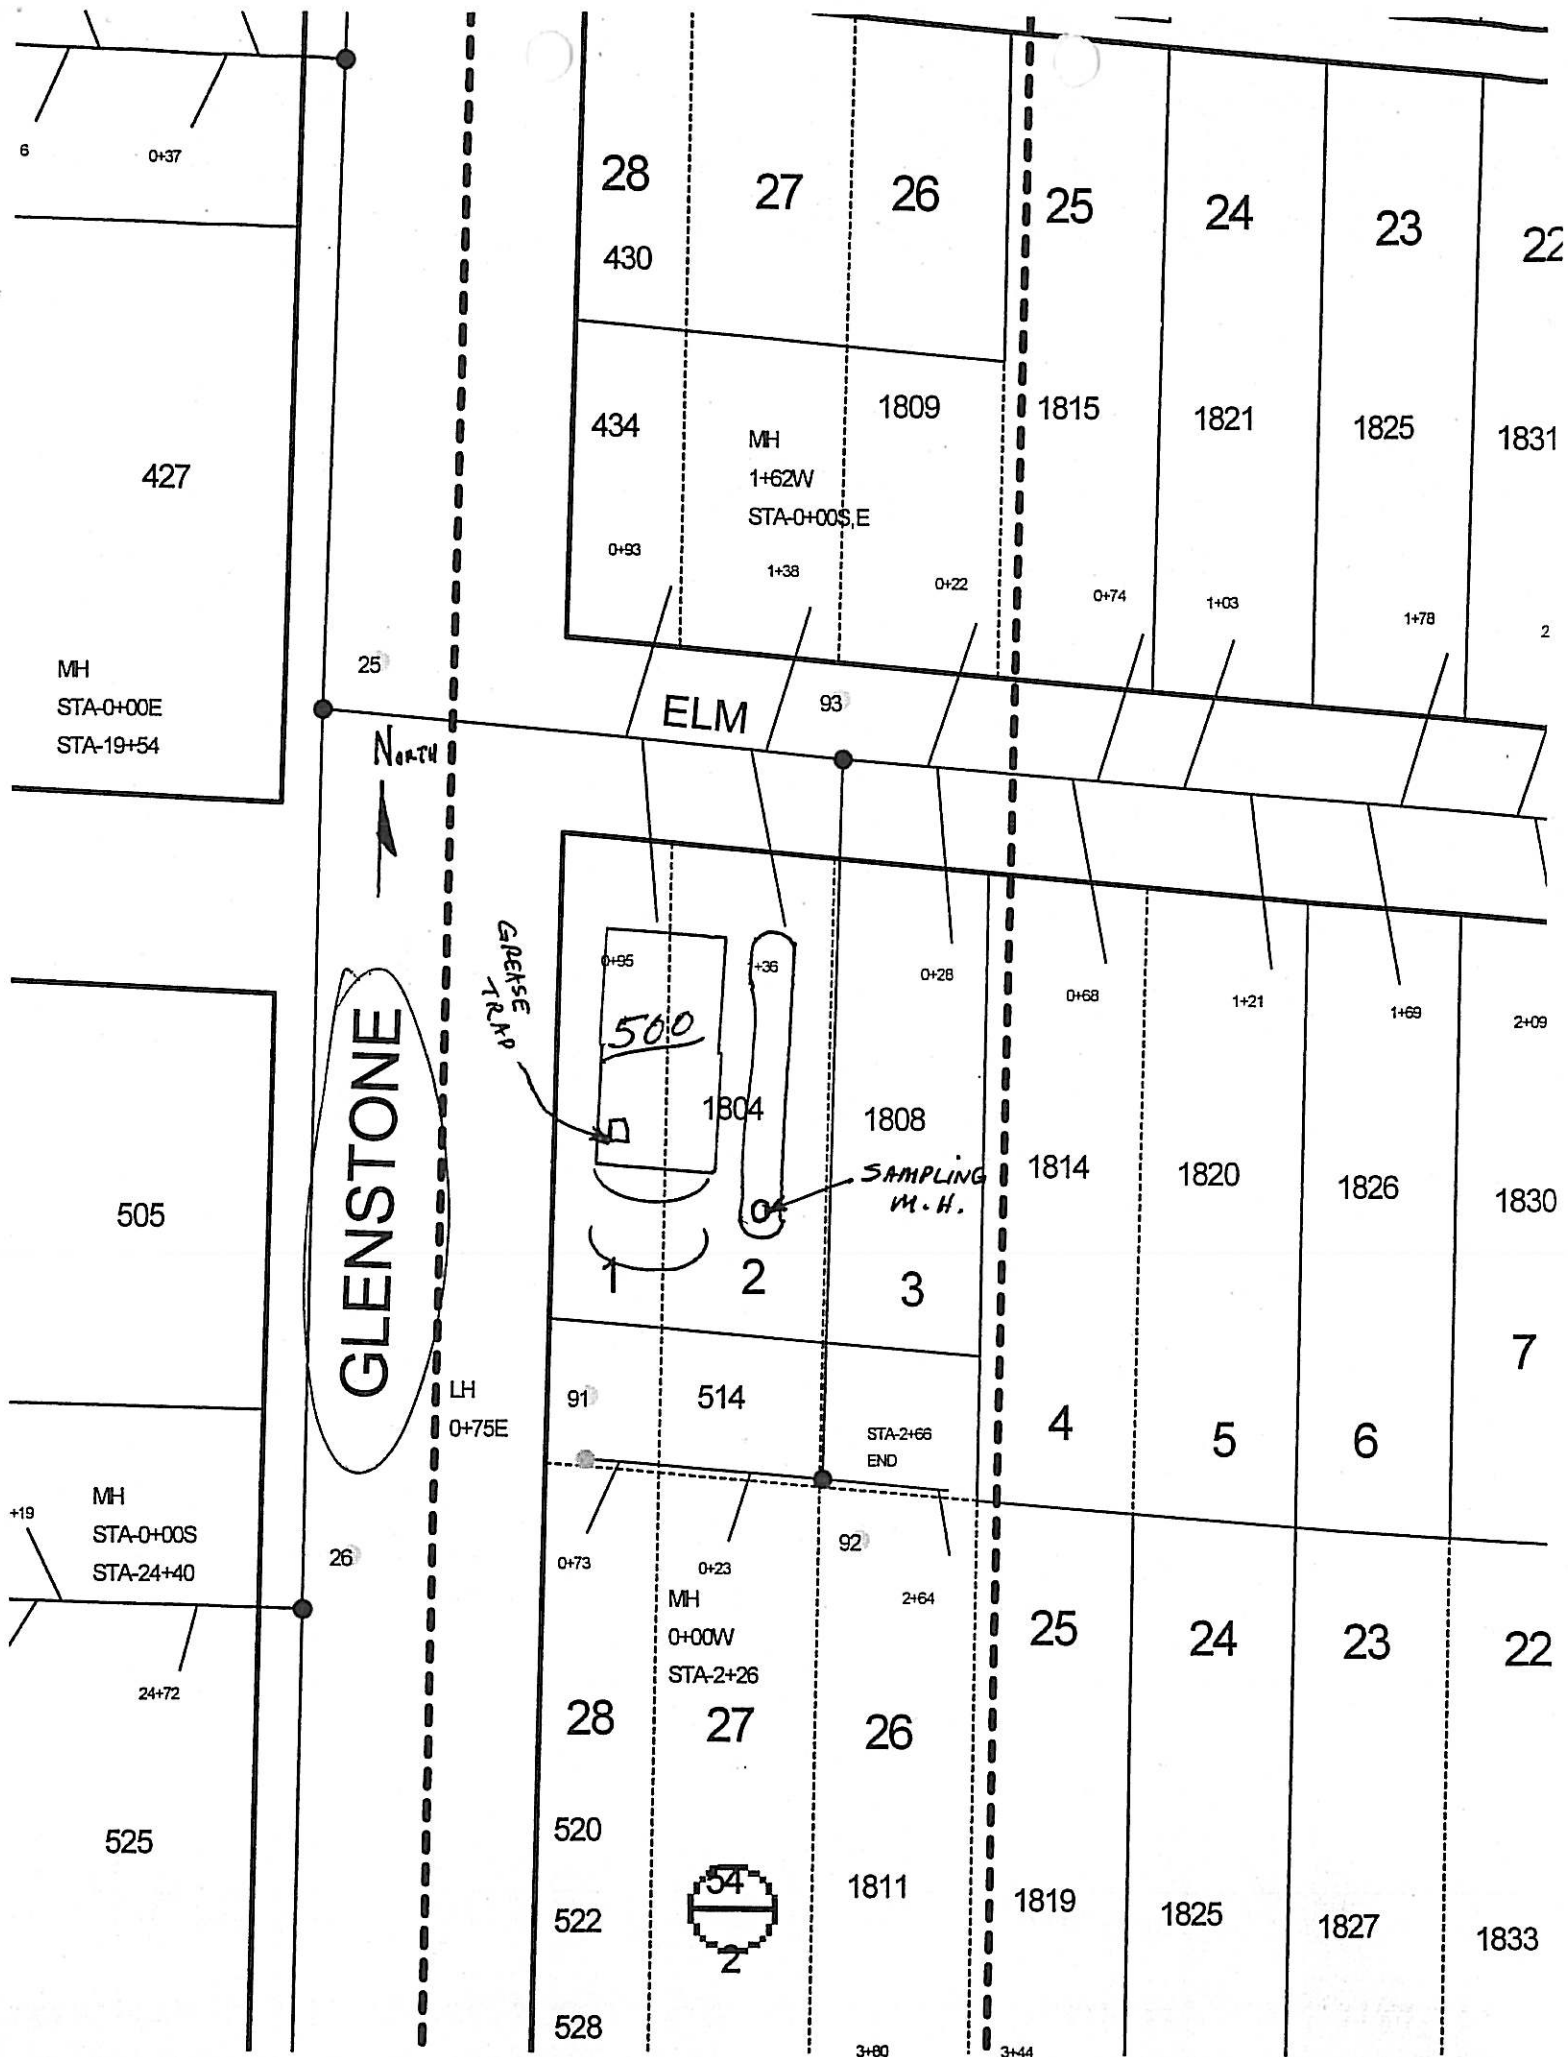

36  
15

1

2

4021

MH A7  
0+27S  
T-1266.00  
FL-1257.81

12


MH A6  
0+00N,W  
T-1265.60  
FL-1257.48

11

3

SAMPLING M.H.

GREASE TRAP

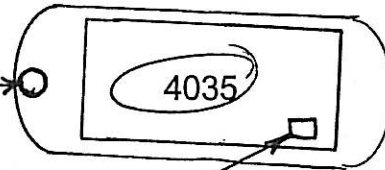

NORTH

S. CAMPBELL

MH A4  
1+90N,0+00S  
T-1267.20  
FL-1255.63

1

2

4049

9

